
INTRAFLOW AS SAFETY INFUSION SET

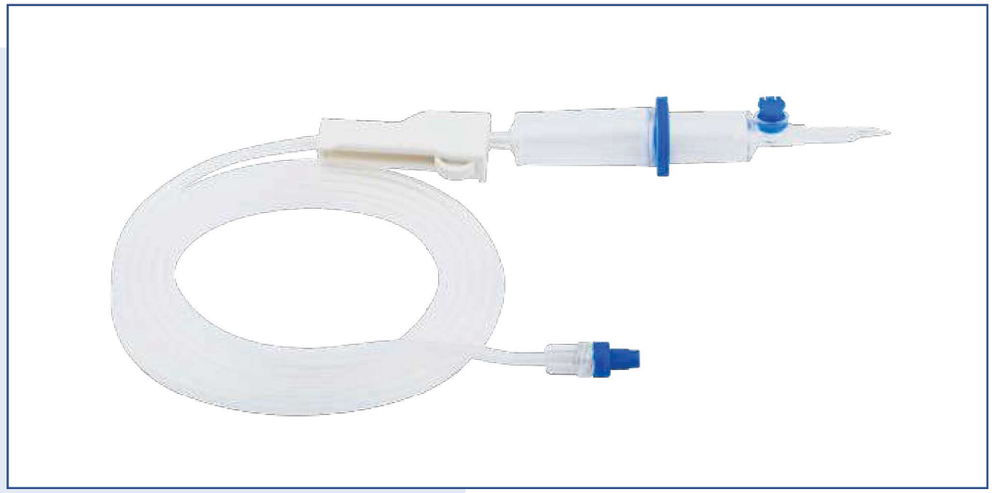

INTRAFLOW AS™ GS-3061 AS

- Safety vented infusion set.
- Longer drip chamber fits firmly in the user's hands, ensuring a better grip.
- Unique air stop feature, which is a hydrophilic filter membrane present at the bottom of the drip chamber prevents the entry of air in case of emptied fluid container.
- Innovative prime stop, which is a hydrophobic membrane placed on the fixed luer lock fitting that stops fluid dripping on the floor.
- Soft, clear 180 cm long kink resistant tubing.
- Modified roller controller, provided with tube docking port to hold the set when not in use.
- Spike dock is provided in roller controller for safe disposal of set after use.
- Sterile, individually blister packed.
- Polybag of 10/ Master Box of 200.


SPECIFICATIONS

Tube Length	Drop Rate
180 cm	20 drops per ml

SPECIAL FEATURES

★ Air Stop Prevents Air Embolism
★ Prime Stop Automates Priming ★ Luer Lock

ROTAFLO EXTENSION SET

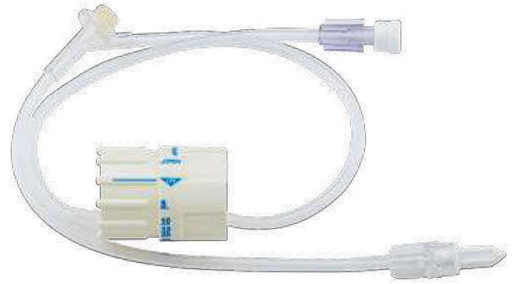

ROTAFLO™ GS-3303

- Flow regulator with extension set for precise flow control.
- Reliable flow rate accuracy across the full adjustable scale.
- Male luer connector at one end, female luer connector at other end.
- Ergonomic dial design with ridges for easy grip and adjustment.
- Precise flow rate control of IV fluids with range of 5 ml/hr-250 ml/hr.
- Soft and kink resistant tubing.
- Provided with a latex free "Y" type injection port made up of isoprene intermittent medication.
- Can be used with all standard I.V sets using luer lock connections.
- Sterile, individually packed.
- Box of 10/ Master Box of 100.

SPECIFICATIONS

Tube Length	I.D/ O.D
170 cm	2.9 / 4.1 mm

SPECIAL FEATURES

★ Flow Control Extension ★ Ergonomic Dial Design
★ Compatible with Standard Sets ★ Y Injection Port